



# Electric Strikes | For Cylindrical Locks



## Specifications


<b>85001 ELECTRIC STRIKE:</b>	• Designed for use with all PDQ Grade 1 and Grade 2 Cylindrical Locks
<b>85003 ELECTRIC STRIKE:</b>	• Designed for use with all PDQ MR Series Mortise Locks WITHOUT Deadbolt
<b>FEATURES:</b>	<ul style="list-style-type: none"><li>• Input voltage:12-24 VDC</li><li>• Field changeable from FAIL SECURE to FAIL SAFE</li><li>• Factory tested to 1,000,000 cycle</li></ul>
<b>CURRENT:</b>	<ul style="list-style-type: none"><li>• 0.28A @ 12 VDC</li><li>• 0.14A @ 24 VDC</li></ul>
<b>FINISH:</b>	• 630 (US32D) Satin Stainless Steel

## Electric Strikes

PART NO.	DESCRIPTION
85001	For Cylindrical Locks
85003	For Mortise locks (no Deadbolt)

**NOTE:** Check with Factory for other finishes.

# 9910 Electric Strike | For 63/6400 Rim Exit Devices

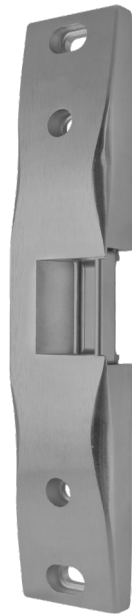


9910

## Specifications

9910 ELECTRIC STRIKE:	• Designed for use with all PDQ 6300 / 6400 Rim Exit Devices
FEATURES:	<ul style="list-style-type: none"><li>• Completely surface-mounted</li><li>• Accommodates 1/2" to 3/4" (13mm–19mm) latch projection</li><li>• Mounting spacer included to provide enhanced latch engagement</li><li>• Stainless steel ensures superior strength and creates a sleek aesthetic design</li><li>• Horizontal adjustment ensures proper latch positioning to compensate for door misalignment – up to 1/4" (6.4mm)</li><li>• Conventional keeper design</li><li>• Plug-in wire connectors</li><li>• Lockdown holes for secure mount</li><li>• HEX socket head cap screws for added support</li><li>• Installation tool included</li><li>• Non-handed</li></ul>
CERTIFICATIONS, LISTINGS, COMPLIANCES:	<ul style="list-style-type: none"><li>• 1,500lbf Static</li><li>• 70 ft-lb Dynamic</li><li>• 250,000 Cycles</li><li>• Fail-Secure</li><li>• 3-Hour Fire Rated</li></ul>
CURRENT:	• 500mA Field-Selectable 12/24VDC & 12-24VAC (Max at 12VDC)
WARRANTY:	• 5 Year Limited Warranty
FINISH:	• 630 (US32D) Satin Stainless Steel

# EPT100 - Electric Power Transfer

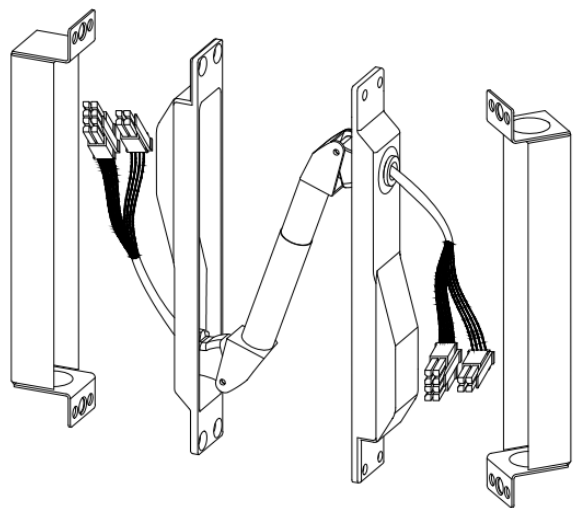

## Specifications



<b>MODEL NUMBERS:</b>	<ul style="list-style-type: none"><li>• EPT100 - ISMC US28</li><li>• EPT100 - ISMC S4</li></ul>
<b>FEATURES:</b>	<ul style="list-style-type: none"><li>• (12) 24 AWG wires with Industry Standard Molex Connectors (ISMC)</li><li>• Max Rating: 24 VDC, 1A</li><li>• Mortises into door and frame and is completely concealed when door is closed</li><li>• UL / ULC Listed for fire doors</li></ul>
<b>FINISHES:</b>	<ul style="list-style-type: none"><li>• US28 (628) - Satin Aluminum</li><li>• S4 (693) - Black Painted</li></ul>

# Wire Harness



## Specifications

FEATURES:	<ul style="list-style-type: none"><li>• Molex Connector on one end with other end pinned (Allegion Configuration)</li><li>• Quick and easy installation</li><li>• Wires are coordinated to work with other PDQ electro-mechanical hardware products</li><li>• Easy disconnect to allow fast and safe maintenance on products</li></ul>
-----------	--

MODEL NUMBERS:	FEATURES:
ISMC - 6	6" Wire Harness
ISMC - 38	38" Wire Harness
ISMC - 44	44" Wire Harness
ISMC - 50	50" Wire Harness
ISMC - 192	192" Wire Harness



## SECURING CONFIDENCE **OPENING** **POSSIBILITIES**

**Phone:** 800.441.9692

**Tech Support:** 833.273.7832

**Email:** [help@pdqlocks.com](mailto:help@pdqlocks.com)

**Headquarters:** 2230 Embassy Drive, Lancaster, PA  
17603 P.O Box 6426, Lancaster, PA 17607

**Regional Distribution Centers:** Lancaster, PA | Norcross,  
GA | Auburn, WA